MODEL EM-6035 OMNI DIRECTIONAL 1. SENSITIVITY (O dB=1V/μbar,1KHz, VCC=2V, RL=2.2KΩ) -38±2dB -40±2dB -42±3dB OMNI DIRECTIONAL 2. CIRCUIT DIAGRAM FET impedance converter Tem.1 Output Tem.2 Ground

Shield case

3. SPECIFICATIONS

-44±3dB -46±3dB

1. IMPEDANCE : Less than $2.2K\Omega$

2. STANDARD VOLTAGE: 2.V

3. RANGE OF OPERATING VOLTAGE: 1.5V TO 10V


4. CURRENT DRAIN: 0.5mA MAX

5. S/N RATIO: 58 dB or more


6. MAXIMUM INPUT SOUND PRESSURE: 120 dB SPL

7. RoHS Compliant.

4. DIMENSION

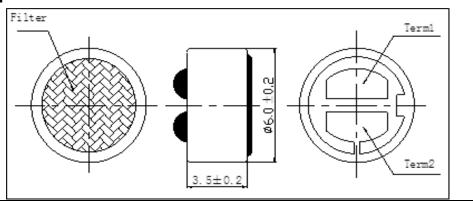

5. TYPICAL FREQUENCY RESPONSE CURVE

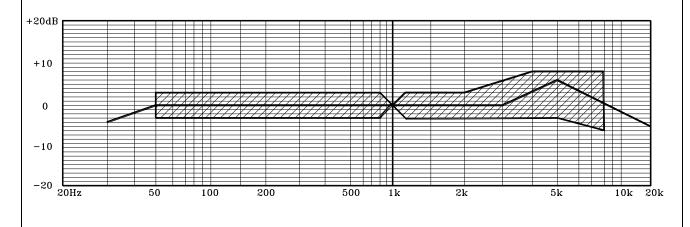

6. RELIABILITY TEST

VIBRATION TEST	TO BE NO INTERFERENCE IN OPERATION AFTER VIBRATION 12Hz TO 50Hz FOR 1 MINUTE FULL AMPLITUDE, FOR 1.5 HOUR AT 3 AXISES.
DROP TEST	TO BE NO INTERFERENCE IN OPERATION AFTER DROPPED TO CONCERTET FLOOR EACH ONE TIME FROM 1 METER HEIGHT AT 3 DIRECTONS IN STATE OF PACKING.
TEMPERATURE TEST	a) AFTER EXPOSURE AT 55° FOR 1 HOUR, SENSITIVITY TO BE WITHIN +/-3dB FROM INITIAL. b) AFTER EXPOSURE AT -10° FOR 1 HOUR, SENSITIVITY TO BE WITHIN +/-3dB FROM INITIAL. (THE MEASUREMENT TO BE DONE AFTER 2 HOURS OF CONDITIONING AT 25°C.)
HUMIDITY TEST	AFTER EXPOSURE AT 40°C AND 95% RH FOR 48 HOURS, SENSITIVITY TO BE WITHIN +/-3dB FROM INITIAL. (AFTER 1 HOUR OF CONDITIONING AT 25°C.)
TEMPERATURE CYCLE TEST	AFTER EXPOSURE AT -10°C FOR 1HOUR, AT 25°C FOR 1 HOUR, AT 50°C FOR 1 HOUR, ATO 25°C FOR 2 HOURS, 4 CYCLES ,SENSITIVITY TO BE WITHIN +/-3dB. (AFTER 2 HOURS OF CONDITIONING AT 25°C)

*REGARDING THE SOLDERING OPERATION:

EACH CONDENSER MICROPHONE CONTAINS A FET WITHIN ITS CASE.

GENERALLY, OVER-HEATING, OVER-CHARGE OF VOLTAGE IS EASY TO DESTROY SEMICONDUCTORS.

- 1. USE 30W (OR UNDER) SOLDERING IRON AND MAINTAIN 230°~260°C IN OPERATION.
- 2. SOLDERING SHOULD BE ACCOMPLISHED WITHIN TWO SECONDS AT EACH TERMINAL SO AS NOT TO BE OVERHEATED.
- 3. DO NOT MAKE A CAVITY AT THE SERFACE OF LEAD ON THE PATTERN PLATE. (A CAVITY MAY CHANGE THE CHARACTERISTICE OF CONDENSER MICROPHONE.)



5F., NO 5-1, BAO HORNG RD., HSIN TIEN CITY , TAIPEI, TAIWAN

TEL:886-2-29128689 FAX:886-2-29115517